












END MILL CUTTERS




	Application		Application		Application
	Right angle Drilling		Surface Milling		R Corner Slotted
	Chamfer Of Rounding Hole		Profile Milling		R Corner Side Milling
	Slot Milling		Full Slot		R Slot
	T Type		Angular Plunge Grinding		
	Side Milling		Slab Milling		

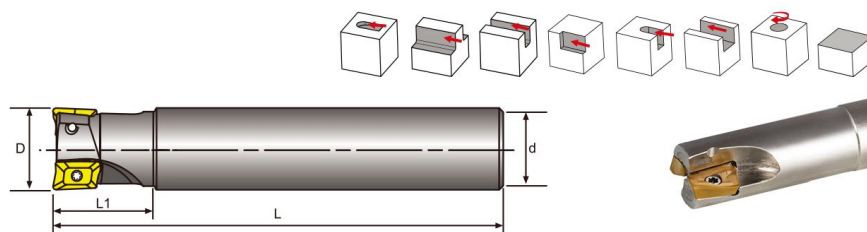

MODEL NO	STOCK	D	d	L	L1	INO	INSERT 	SCREW 	ALLEN KEY 
S AP□□11-D12-100	•	12	12	100	25	1	AP 1135	M 2.5	T-8
S AP□□11-D14-100	•	14	16	100	25	1			
S AP□□11-D16-90	•	16	16	90	25	2			
S AP□□11-D16-160	•	16	16	90	25	2			
S AP□□11-D20-120	•	20	20	120	30	2			
S AP□□11-D20-160	•	20	20	160	30	2			
S AP□□11-D25-120	•	25	25	120	35	3			
S AP□□11-D25-160	•	25	25	160	35	3			
S AP□□11-D25-200	•	25	25	200	35	3			
S AP□□11-D25-250	•	25	25	250	35	3			
S AP□□11-D25-200	•	25	25	200	35	4			
S AP□□11-D32-160	•	32	32	160	35	4			
S AP□□11-D32-200	•	32	32	200	35	4			
S AP□□16-D25-160	•	25	25	160	40	2	AP 1604	M 3.5	T15
S AP□□16-D25-200	•	25	25	200	40	2			
S AP□□16-D25-250	•	25	25	250	40	2			
S AP□□16-D32-160	•	32	32	160	40	3			
S AP□□16-D32-200	•	32	32	200	40	3			
S AP□□16-D32-250	•	32	32	250	40	3			

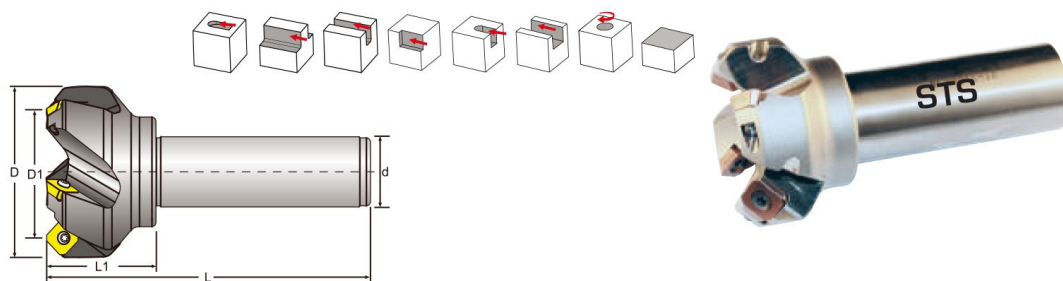


MODEL NO	STOCK	D	D1	d	L	L1	INO	INSERT 	SCREW 	ALLEN KEY 
SE50-C32-4	●	62	50	32	120	45	4	SE 12T3	4 MM	T-15
SE50-C32-4-12T3	●	62	50	32	120	45	4	SE 12T3		

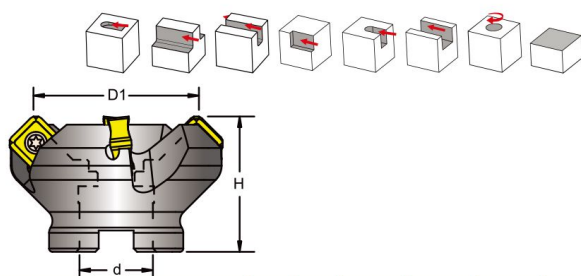


MODEL NO	R	L	D	D1	d	H	INO	INSERT 	SCREW 	ALLEN KEY 
50A04R/L-S45SE12B	●		64	50	22	40	4	SE-12T3	4 MM	T-15
63A05R/L-S45SE12A	●		74	63	25.4	50	5			
80B06R/L-S45SE12A	●		94	80	25.4	50	6			
100B08R/L-S45SE12A	●		114	100	31.75	50	8			
125B08R/L-S45SE12A	●		139	125	38.1	63	8			
63A05R/L-S45SE12B	●		74	63	22	50	5			
80B06R/L-S45SE12B	●		94	80	27	50	6			
100B08R/L-S45SE12B	●		114	100	32	50	8			
125B08R/L-S45SE12B	●		139	125	40	63	8			

■ SEKT 12T3 INSERT

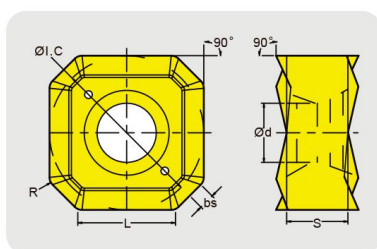

Shape	Model No
	SEKT 12T3

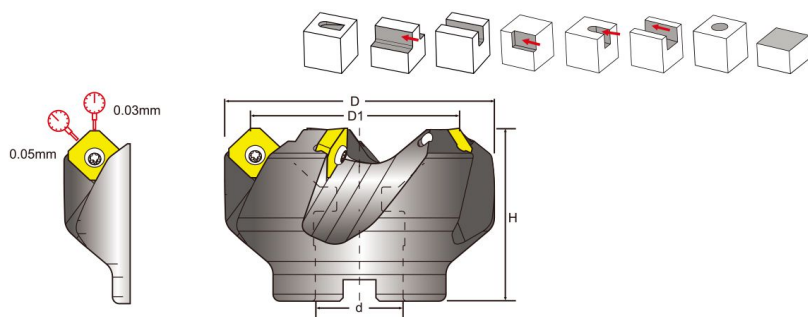


MODEL NO	R	L	D	D1	d	H	INO	INSERT	SCREW	ALLEN KEY
50A04R-S45SE12B	●		64	50	22	40	4	SE1204	4.5 MM	
63A05R-S45SE12A	●		77	63	25.4	50	5			
80B06R/L-S45SE12A	●	●	93	80	25.4	50	6			
100B06R/L-S45SE12A	●	●	114	100	31.75	50	6			
125B08R/L-S45SE12A	●	●	139	125	38.1	63	8			
160B10R/L-S45SE12A	●		179	160	50.8	63	10			
63A05R-S45SE12B	●		77	63	22	40	5			
80B06R/L-S45SE12B	●	●	93	80	27	50	6			
100B06R/L-S45SE12B	●	●	114	100	32	50	6			
125B08R/L-S45SE12B	●		139	125	40	63	8			
160B10R/L-S45SE12B	●		179	160	40	63	10			



MODEL NO	STOCK	D	d	L	INO	INSERT	SCREW	ALLEN KEY
TC16-30°	●	25	16	100	2	TC□□16T3	4 MM	T-15
TC16-45°	●	25	16	100	2			
TC25-45°	●	32	25	100	2			
TC25-30°	●	32	25	100	2			
SC25-45°	●	40	25	115	2	SC□□2206	6 MM	T-25
SC25-30°	●	40	25	115	2			

TC INSERT

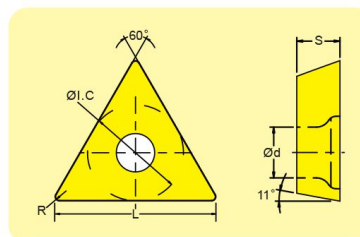

SHAPE	INSERT	R
	TCMT16T3	0.4
	TCMT16T3	0.8
	TCGT16T3	0.8